








Junction box for vari-focal lens turret cameras

DWC-MT9JUNC2

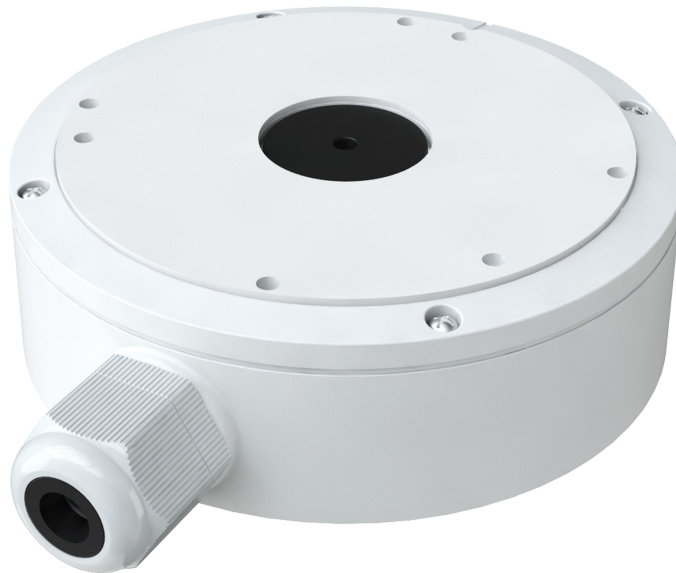

WHAT'S IN THE BOX

Mounting Screws and Anchors (6.5x38mm, head diameter 12mm)		x4
Waterproof Rings for Mounting Screws		x4
Mounting Template		x1
Camera Mounting screws (PM4x10mm, head diameter 6.6mm)		x4
Camera Mounting screws (PM4x16mm, head diameter 8mm, optional)		x4
Cable Gland Connector		x1




NOTE: Download all your support materials and tools in one place.

1. Go to: <http://www.digital-watchdog.com/resources>
2. Search your product by entering the part number in the **'Search by Product'** search bar. Results for applicable part numbers will populate automatically based on the part number you enter.
3. Click **'Search'**. All supported materials, including manuals and quick start guide (QSGs) will appear in the results.




INSTALLATION

- 1 Separate the mounting plate from the junction box base by loosening the four (4) screws.
- 2 Using the mounting template or the junction box base itself, mark and drill the necessary holes on the mounting surface.
- 3 Secure the junction box base to the mounting surface using the screws and anchors that were included with the junction box.
- 4 Connect the mounting plate to the junction box's base using the included screws (from INSTALLATION Step 1).

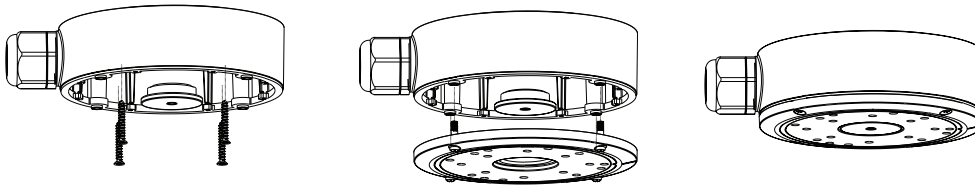

- 4 Connect the camera to the junction using the included camera mounting screws.
- 5 Make all necessary cable connections to the camera and arrange the cables in the junction box base. Use the waterproof cap and gasket with the network cable to reduce the risk of water leaks. See the camera's QSG for more information.

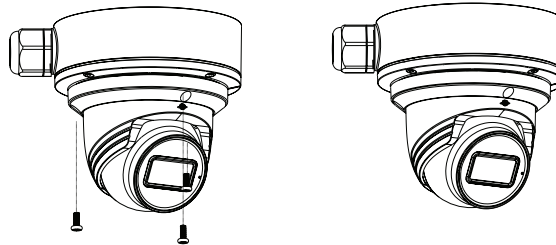

- 7 Adjust the camera's position and angle by loosening the lock screw at the base of the camera. When the camera's desired position is achieved, secure the lock screw back in place to complete the installation.